




Protective

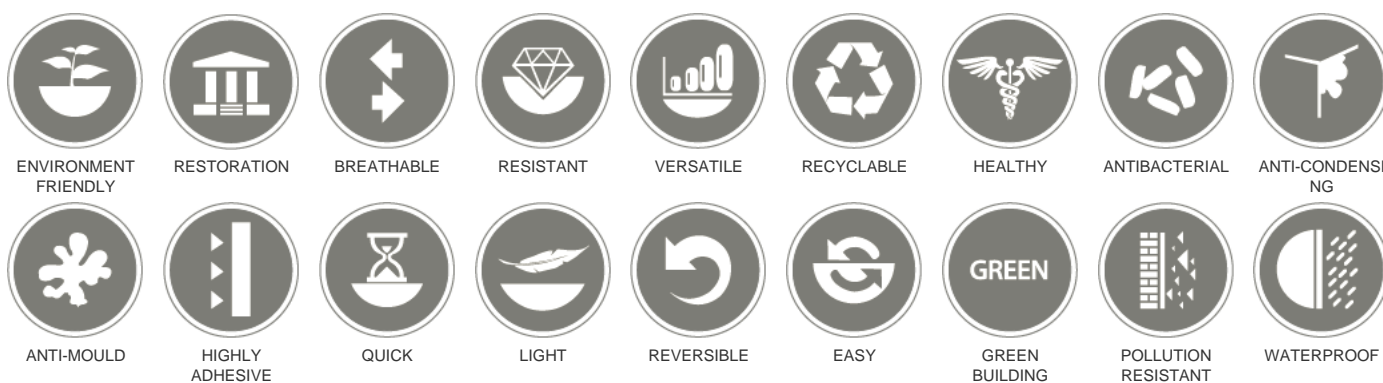

TECHNICAL DATA

PRODUCT TYPE	Protective natural wax for interior lime stucco
pH	6.5-7
DENSITY	980 Kg/m³
VISCOSITY	from 1000 to 1200 cps
2010 CE LIMIT VALUE OF VOC (cat. A/a) 30 g/l	Max VOC 5 g/l
DRYING	at 20°C and 60% R.H. to the touch at 1 hour completed in 48 hrs
CONSUMPTION	about 5 m²/l
DILUTION	ready to use
DRY RESIDUE	105°C - 11.0% +/-2%
COMPATIBILITY	
APPLICATION	
PACKAGING	2,5 l tin
STORAGE	12 month stored in original unopened containers in a dry place away from sources of heat and frost
APPLICATION TEMPERATURE	from +5°C to +32°C
REACH CLASSIFICATION	See SDS